

## BW Industrial Cable Gland

Brass indoor glands most suitable for single wire armoured, plastic or rubber sheathed cable.


Earth tags to be use for earth continuity.

Recommended to use with shroud for additional ingress protection.



### TECHNICAL DATA

Type	BW KNURLING TYPE
Design Specification	BS 6121 : Part I : 1989
Ingress Protection	IP3X
Gland Material	Brass
Finish	Plain Brass or Nickel Plated
Cable Type	Steel Wire Armour
Armour Clamping	Two Part Armour Lock

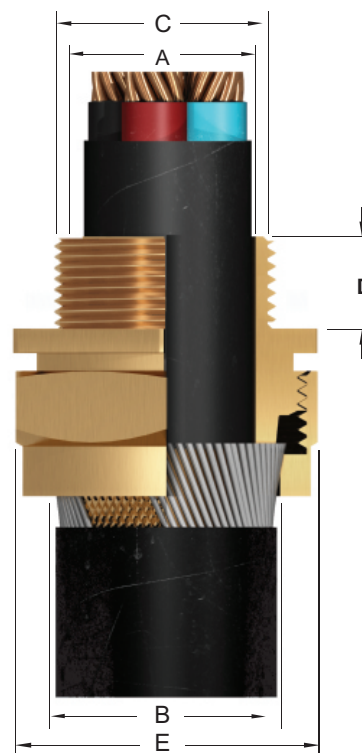

Gland Size	CABLE DIMENSIONS ACCOMODATED			GLAND DIMENSIONS					E- CODE
	Under Armour Dia Max.	Overall Dia Max.	Armour Wire Dia	Dia 'A'	Dia 'B'	Metric Entry Thread 'C'	Minimum Thread Length 'D'	Across Flat 'E' Max	
16	9.5	16.0	0.9/1.25	10.2	15.9	16	10	21.00	ABW0016LB
20S	11.7	16.0	0.9/1.25	12.5	15.9	20	10	21.00	ABW0020SB
20	13.9	21.0	0.9/1.25	14.1	18.1	20	10	23.40	ABW0020LB
25	19.9	27.0	1.25/1.60	20.6	26.1	25	10	33.50	ABW0025LB
32	26.0	34.0	1.60/2.0	26.9	34.3	32	10	40.10	ABW0032LB
40	31.0	40.9	1.60/2.0	32.5	40.9	40	15	50.30	ABW0040LB
50S	38.1	50.5	2.0/2.5	38.5	47.0	50	15	56.65	ABW0050SB
50	44.0	53.0	2.0/2.5	44.5	52.8	50	15	62.70	ABW0050LB
63	55.9	68.0	2.5	56.4	65.4	63	15	76.20	ABW0063LB
75	67.9	82.9	2.5	68.3	77.7	75	15	92.70	ABW0075LB

Dimensions in Millimeters