


BI-METALLIC CONNECTOR CONDUCTOR TO CONDUCTOR

This connectors are used in bi-metallic earthing systems. It is recommended to use inhibiting compound with this assembly.

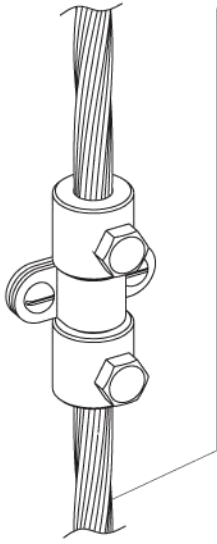

MATERIAL : EC GRADE ALUMINIUM & COPPER
 BOLT : STAINLESS STEEL - SS304

Cu Conductor Size in mm ²	Alu Conductor Size in mm ²	E - Code
35 - 50	35 - 50	BMCC3550
70 - 95	70 - 95	BMCC7095

