

## CZ Industrial Cable Gland

Brass gland suitable for steel tape armoured, plastic or rubber sheathed cables. Terminates and secure cable armouring and outer seal grips sheath of cable thus ensuring mechanical strength and earth continuity.

CZ brass glands are also supplied with integral earth facilities.


Earth tags to be use for earth continuity.

Recommended to use PVC shroud for additional ingress protection.



### TECHNICAL DATA

Type	CZ
Design Specification	BS 6121 : Part 1 : 1989
Ingress protection	IP 66
Gland Material	Brass
Finish	Plain Brass or Nickel Plated
Seal Material	Thermoplastic Elastomer
Cable Type	Steel Tape Armour
Armour Clamping	Three Part (With Lock Nut)
Sealing Technique	Compression Type
Sealing Area	Outer Sheath

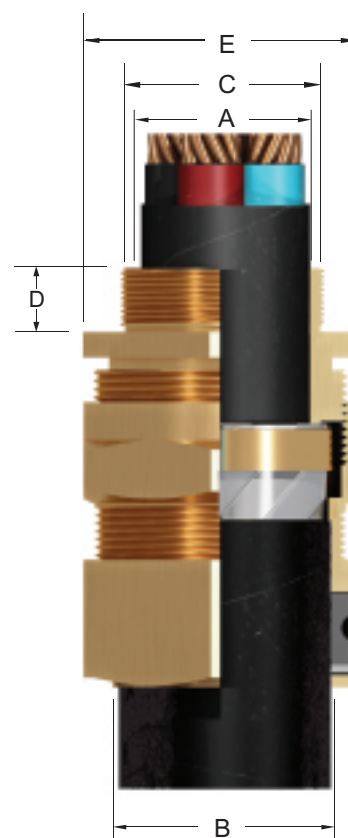

Gland Size	CABLE DIMENSIONS ACCOMODATED			GLAND DIMENSIONS					E- CODE
	Under Armour Dia Max	Overall Dia Max	Steel Tape Thickness	Dia 'A'	Dia 'B'	Metric Entry Thread 'C'	Minimum Thread Length 'D'	Across Flat 'E' Max	
16	6.0	13.2	0.15/0.35	9.5	16.9	16	10	24.20	CZG0016B
20S	11.6	15.8	0.15/0.35	12.3	17.0	20	10	24.00	CZG0020SB
20L	13.9	19.5	0.15/0.5	14.3	20.3	20	10	27.17	CZG0020LB
25S	15.5	25.8	0.15/0.5	18.3	26.4	25	10	32.75	CZG0025SB
25L	19.9	26.0	0.15/0.5	20.8	26.9	25	10	34.30	CZG0025LB
32	25.2	33.5	0.15/0.55	26.9	34.1	32	10	42.90	CZG0032B
40S	29.4	38.5	0.2/0.6	31.5	39.6	40	15	49.30	CZG0040SB
40L	32.1	39.9	0.2/0.6	32.5	41.8	40	15	50.80	CZG0040LB
50S	39.5	49.0	0.5/0.8	40.9	50.2	50	15	61.70	CZG0050SB
50L	43.2	51.0	0.5/0.8	44.4	52.8	50	15	63.75	CZG0050LB
63S	50.6	58.9	0.5/0.8	51.8	61.9	63	15	73.90	CZG0063SB
63L	55.9	65.3	0.5/0.8	56.4	66.5	63	15	78.50	CZG0063LB
75S	61.9	71.6	0.5/1.0	63.2	74.2	75	20	87.40	CZG0075SB
75L	67.9	78.0	0.5/1.0	68.6	78.5	75	20	96.00	CZG0075LB
90	74.0	88.0	0.5/1.0	79.0	90.2	85	20	105.30	CZG0090B

Dimensions in Millimeters