


EARTHING CONDUCTORS

FLEXIBLE TINNED COPPER BRAID

Manufactured from high conductivity copper wire to BS4109-C101.

Suitable for earth bonding. Also supplied as standard pre-cut & Drilled Bonds.

This is used for bonding of gates, Metal doors, Fences & application where flexibility is required.

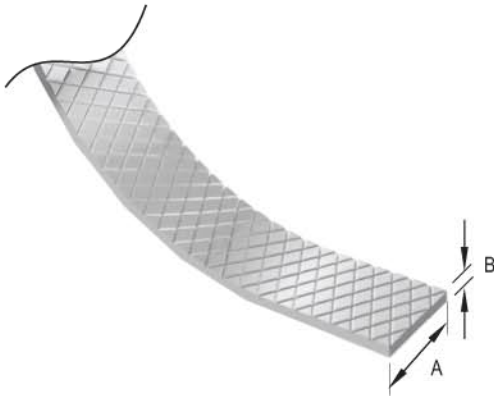

Overall size (A x B) mm	Size (mm ²)	Current Rating Amp	E - Code
12 x 1.5	8.4	40	FTB0121
12 x 3	16.8	105	FTB0123
19 x 1.5	12.1	63	FTB0191
19 x 3.0	22.4	140	FTB0193
25 x 1.5	19.6	85	FTB0251
25 x 3	36.5	200	FTB0253
25 x 6	73	400	FTB0256
32 x 1.5	36.5	120	FTB0321
32 x 3	42.1	240	FTB0323
32 x 6	81.4	400	FTB0326
38 x 3	53.3	800	FTB0383
38 x 6	80	500	FTB0386
50 x 3	70.2	400	FTB0503
50 x 6	109.5	800	FTB0506
50 x 12	280	1500	FTB5012
75 x 6	140.4	1000	FTB0756

